


*Photos and specifications are subject to change at anytime



- Compact road frame with four sizes for wide-fit range
- Lightweight alloy EN-certified frame
- Versatile Shimano A070 14-speed drivetrain
- Integrated Shimano STI shifting and braking
- Confidence-inspiring 700 x 25C Kenda tires

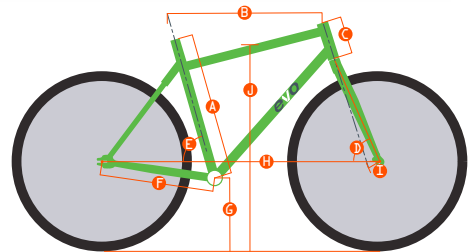

Frame	TIG-welded aero-taper 6061 aluminum
Fork	1-1/8" aero-taper leg 6061 aluminum
Handlebar	EVO alloy 25.4 mm clamp compact design
Stem	EVO alloy 4-bolt face plate, 31.8 x 100 mm, 7° rise
Grips	EVO custom comfort tape
Shifters	Shimano A070 14-speed STI shift/brake levers
Rear Derailleur	Shimano A070
Crank Set / Chainring(s)	EVO alloy compact 170 mm / Compact 34/50T steel rings
Rear Sprocket, Cas- sette or Freewheel	Shimano MF-TZ21 14/28 7-speed
Pedals	FP-906 alloy/hi-impact resin, 9/16"
Chain	KMC Z50, 1/2" x 3/32"
Brakes	Radius RC469 47-57 mm with angle adjust pads
Saddle	EVO Custom Road Sport, steel rails
Seatpost	Alloy w/o clamp, 27.2 x 300 mm
Front Wheel	700c x 36H x 14G, double wall aero alloy with CNC brake track
Rear Wheel	700c x 36H x 14G, double wall dero alloy with CNC brake track
Tires	Kenda K196 700 x 25c

Diagram	Equivalent Size	Imperial				Metric			
		S	M	L	XL	S	M	L	XL
	Equivalent Size	50	52	55	58	50	52	55	58
A	Seat Tube (Actual)	17.72	18.70	20.47	21.65	450	475	520	550
B	Effective Top Tube	20.47	21.46	21.85	22.64	520	545	555	575
C	Head Tube Length	5.12	5.51	6.30	7.09	130	140	160	180
D	Head Angle (Degrees)	71	71.5	72	72	71	71.5	72	72
E	Seat Tube Angle (Degrees)	74.5	74.5	73.5	73	74.5	74.5	73.5	73
F	Chainstay Length	16.93	16.93	16.93	16.93	430	430	430	430
G	BB Drop	2.76	2.76	2.76	2.76	70	70	70	70
H	Wheelbase	39.96	40.38	40.57	41.14	1015	1025.6	1030.6	1045
I	Fork offset	1.77	1.77	1.77	1.77	45	45	45	45
J	Stand Over Height	28.35	29.33	30.71	31.89	720	745	780	810