


\*Photos and specifications are subject to change at anytime

**NEW**



- Sport design for fitness and general pavement riding
- Lightweight alloy EN-certified frame
- Smooth-rolling 700 x 32c tires
- Reliable alloy V-brakes
- Versatile Shimano 21-speed drivetrain

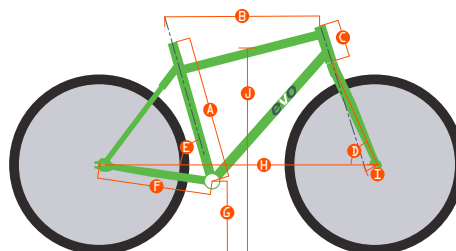

Frame	TIG-welded aero-taper 6061 aluminum
Fork	1-1/8" OS aero-taper 6061 aluminum
Handlebar	EVO Riser alloy 620 mm width x 20 mm rise, 31.8 mm clamp
Stem	Alloy 4-bolt face plate, 25.4 x 100 mm
Grips	EVO custom soft Kraton rubber dual compound 135 mm
Shifters	Shimano EF51 21-speed (3x7) shift levers
Rear Derailleur	Shimano TX35D
Crank Set / Chainring(s)	EVO Alloy Trekking 24/34/42T, 170 mm / Steel 24/34/42T rings
Rear Sprocket, Cassette or Freewheel	Shimano MF-TZ21 14/28 7-speed
Pedals	EVO steel cage/hi-impact resin, 9/16"
Chain	KMC Z50, 1/2" x 3/32"
Brakes	EVO alloy linear pull brake, 110 mm length
Saddle	EVO Custom Sport, steel rails
Seatpost	Alloy w/o clamp, 27.2 x 350 mm
Front Wheel	700c x 36H x 14G, double wall aero alloy
Rear Wheel	700c x 36H x 14G, double wall aero alloy
Tires	Kenda K193 700 x 32c

		Imperial	Metric
Diagram		Ladies	Ladies
	Equivalent Size	16"	16"
A	Seat Tube (Actual)	15.98	406
B	Effective Top Tube	21.26	540
C	Head Tube Length	5.51	140
D	Head Angle (Degrees)	70	70
E	Seat Tube Angle (Degrees)	74	74
F	Chainstay Length	17.52	445
G	BB Drop	2.17	55
H	Wheelbase	41.44	1052.6
I	Fork offset	1.50	38
J	Stand Over Height	22.83	580