


\*Photos and specifications are subject to change at anytime

**NEW**



- Go-anywhere 26x4.0 fat tires
- Sturdy reinforced steel frame construction
- Stand out from the crowd styling
- Comfortable plush saddle and smooth top pedals
- Linear pull brakes
- Versatile 8-Speed Shimano drivetrain

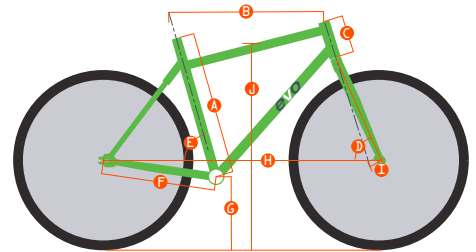

Frame	TIG-welded custom Hi-Tensile steel construction with welded CB mount
Fork	1-1/8" custom Hi-Tensile steel
Handlebar	EVO steel 25.4 mm clamp 680 mm wide x 130 mm high design
Stem	EVO alloy forged 1-1/8" quill, 25.4 x 80 mm x 180 mm
Grips	EVO custom soft Kraton rubber 125 mm
Shifters	Shimano SL-RS47-8R 8-speed
Rear Derailleur	Shimano RD-TX800, 8-speed
Crank Set / Chainring(s)	Alloy, 170 mm / EVO Diamond 32T steel ring
Rear Sprocket, Cas- sette or Freewheel	EVO 8-speed 12-32T
Pedals	EVO Flat Sport with boron axle, Black/Gray
Chain	KMC Z50, 1/2" x 1/8" x 128 L
Brakes	EVO forged alloy linear pull V-brake
Saddle	EVO Custom Comfort Sport, steel rails w/ elastomer suspension
Seatpost	Steel w/o clamp, 27.2 x 400 mm
Front Wheel	26 x 3.0 36H x 14G, alloy with powder coating
Rear Wheel	26 x 3.0 36H x 14G, alloy with powder coating
Tires	EVO All-Terrain 26 x 4.0 on/off pavement

Diagram		Imperial		Metric	
		Men's	Ladies	Men's	Ladies
	Equivalent Size	17"	15.5"	17.5"	15.5"
A	Seat Tube (Actual)	17.5	15.5	445	394
B	Effective Top Tube	26.18	25.59	665	650
C	Head Tube Length	5.91	5.5	150	140
D	Head Angle (Degrees)	69	69	69	69
E	Seat Tube Angle (Degrees)	68	68	68	68
F	Chainstay Length	19.69	19.69	500	500
G	BB Drop	3.15	3.15	80	80
H	Wheelbase	44.49	44.02	1130	1118
I	Fork offset	1.77	1.77	45	45
J	Stand Over Height	29.30	21.66	744.2	550.2