


*Photos and specifications are subject to change at anytime

NEW

* Item may differ



- Alloy frame with integrated rear rack
- Alloy stem, seatpost and cranks
- Double-wall alloy rims with stainless steel spokes and alloy hubs
- Large-volume 26 x 2.4 tires
- Shimano 8 speed drivetrain
- Linear pull brakes

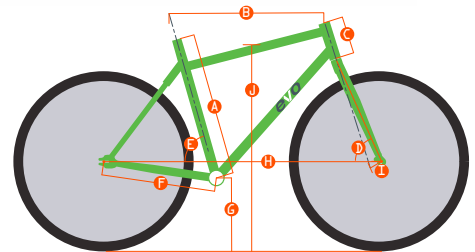

Frame	TIG-welded custom alloy construction with integrated rack
Fork	1-1/8" custom Hi-Tensile steel
Handlebar	EVO steel 25.4 mm clamp 670 mm wide x 125 mm high design
Stem	EVO alloy forged 1-1/8" 180 mm quill, 25.4 x 80 mm length
Shifters	Shimano SL-RS47-8R 8-speed
Front Derailleur	N/A
Rear Derailleur	Shimano RD-TX800 8-speed
Crank Set / Chainring(s)	ProWheel A36, 170 mm / ProWheel A36 36T Steel ring
Rear Sprocket, Cassette or Freewheel	EVO 8-speed 12-32T
Pedals	EVO Multi-Sport alloy with rubber insert, boron axle
Chain	KMC Z410, 1/2" x 1/8"
Brakes	EVO alloy 110 mm linear pull brake
Saddle	EVO Custom Comfort Sport, steel rails
Seatpost	Alloy with integrated clamp, 27.2 x 400 mm
Front Wheel	26 x 1.75 6N x 36H x 14G, alloy
Rear Wheel	26 x 1.75 6N x 36H x 14G, alloy
Tires	EVO Cruiser XL 26 x 2.4 on/off pavement

Diagram		Imperial		Metric	
		Men's	Ladies	Men's	Ladies
	Equivalent Size	18"	17"	18"	17"
A	Seat Tube (Actual)	18.0	17.0	458	432
B	Effective Top Tube	23.70	22.64	602	575
C	Head Tube Length	5.91	6.89	150	175
D	Head Angle (Degrees)	68	68	68	68
E	Seat Tube Angle (Degrees)	66	66	66	66
F	Chainstay Length	17.91	17.91	455	455
G	BB Drop	2.17	2.17	55	55
H	Wheelbase	43.19	43.19	1097	1097
I	Fork offset	2.17	2.17	55	55
J	Stand Over Height	29.65	23.04	753.2	585.2