



*Photos and specifications are subject to change at anytime

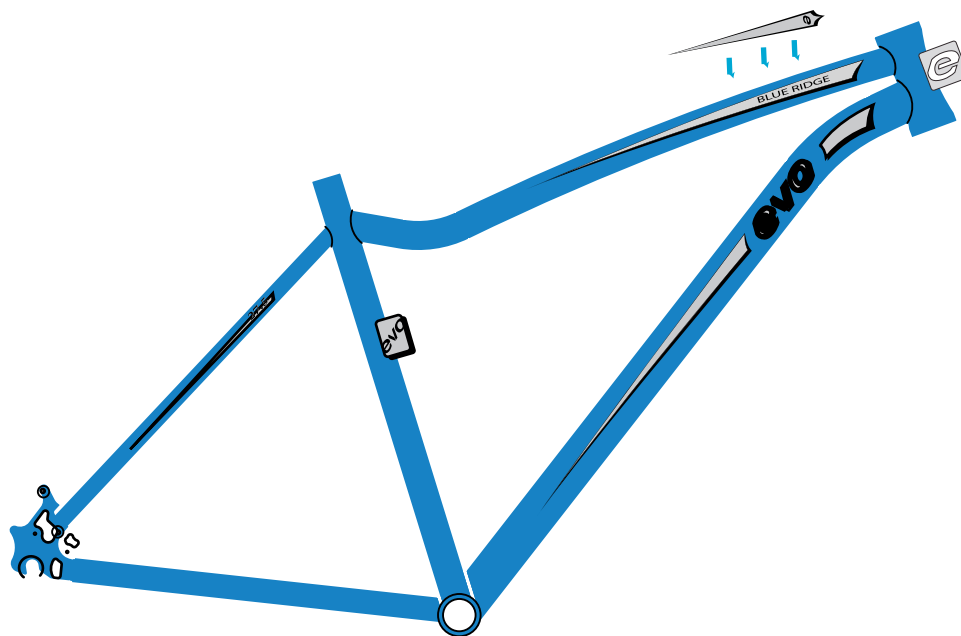

- TIG-welded 6061 alloy frame
- 27.5" double-wall alloy rims with stainless steel spokes
- 24-speed Shimano TX800 drivetrain
- Mechanical disc brakes
- Front suspension

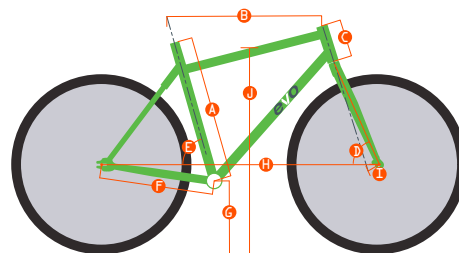

Frame	TIG-welded aero-taper 6061 aluminum
Fork	1-1/8" EVO suspension 50 mm
Handlebar	EVO Riser alloy 680 mm width x 35 mm rise, 25.4 mm clamp
Stem	Alloy 4-bolt face plate, 25.4 x 80 mm
Shifters	Shimano ST-TX800 24-speed (3x8) shift levers
Front Derailleur	Shimano FD-TX800 31.8 mm clamp, top pull
Rear Derailleur	Shimano RD-TX800
Crank Set / Chainring(s)	EVO alloy MTB 170 mm / Steel 24/34/42T rings
Rear Sprocket, Cassette or Freewheel	8-speed 12-32T
Pedals	EVO hi-impact resin, 9/16"
Chain	KMC Z72, 1/2" x 1/8" x 110 L
Brakes	EVO mechanical disc brake, 160 mm rotor
Saddle	EVO Custom Sport, steel rails
Seatpost	Alloy w/o clamp, 27.2 x 350 mm
Front Wheel	27.5" x 32H x 14G, double wall alloy
Rear Wheel	27.5" x 32H x 14G, double wall alloy
Tires	MTB 27.5" x 2.10"

Diagram		Imperial			Metric		
		S	M	L	S	M	L
	Equivalent Size	16"	18"	20"	16"	18"	20"
A	Seat Tube (Actual)	15.98	18.11	20.00	406	460	508
B	Effective Top Tube	23.43	24.21	25.20	595	615	640
C	Head Tube Length	4.33	4.33	4.72	110	110	120
D	Head Angle (Degrees)	69.5	69.5	69.5	69.5	69.5	69.5
E	Seat Tube Angle (Degrees)	73	73	73	73	73	73
F	Chainstay Length	16.93	16.93	16.93	430	430	430
G	BB Drop	1.85	1.85	1.85	47	47	47
H	Wheelbase	42.72	43.50	44.49	1085	1105	1130
I	Fork offset	1.50	1.50	1.50	38	38	38
J	Stand Over Height	25.98	27.76	29.53	660	705	750